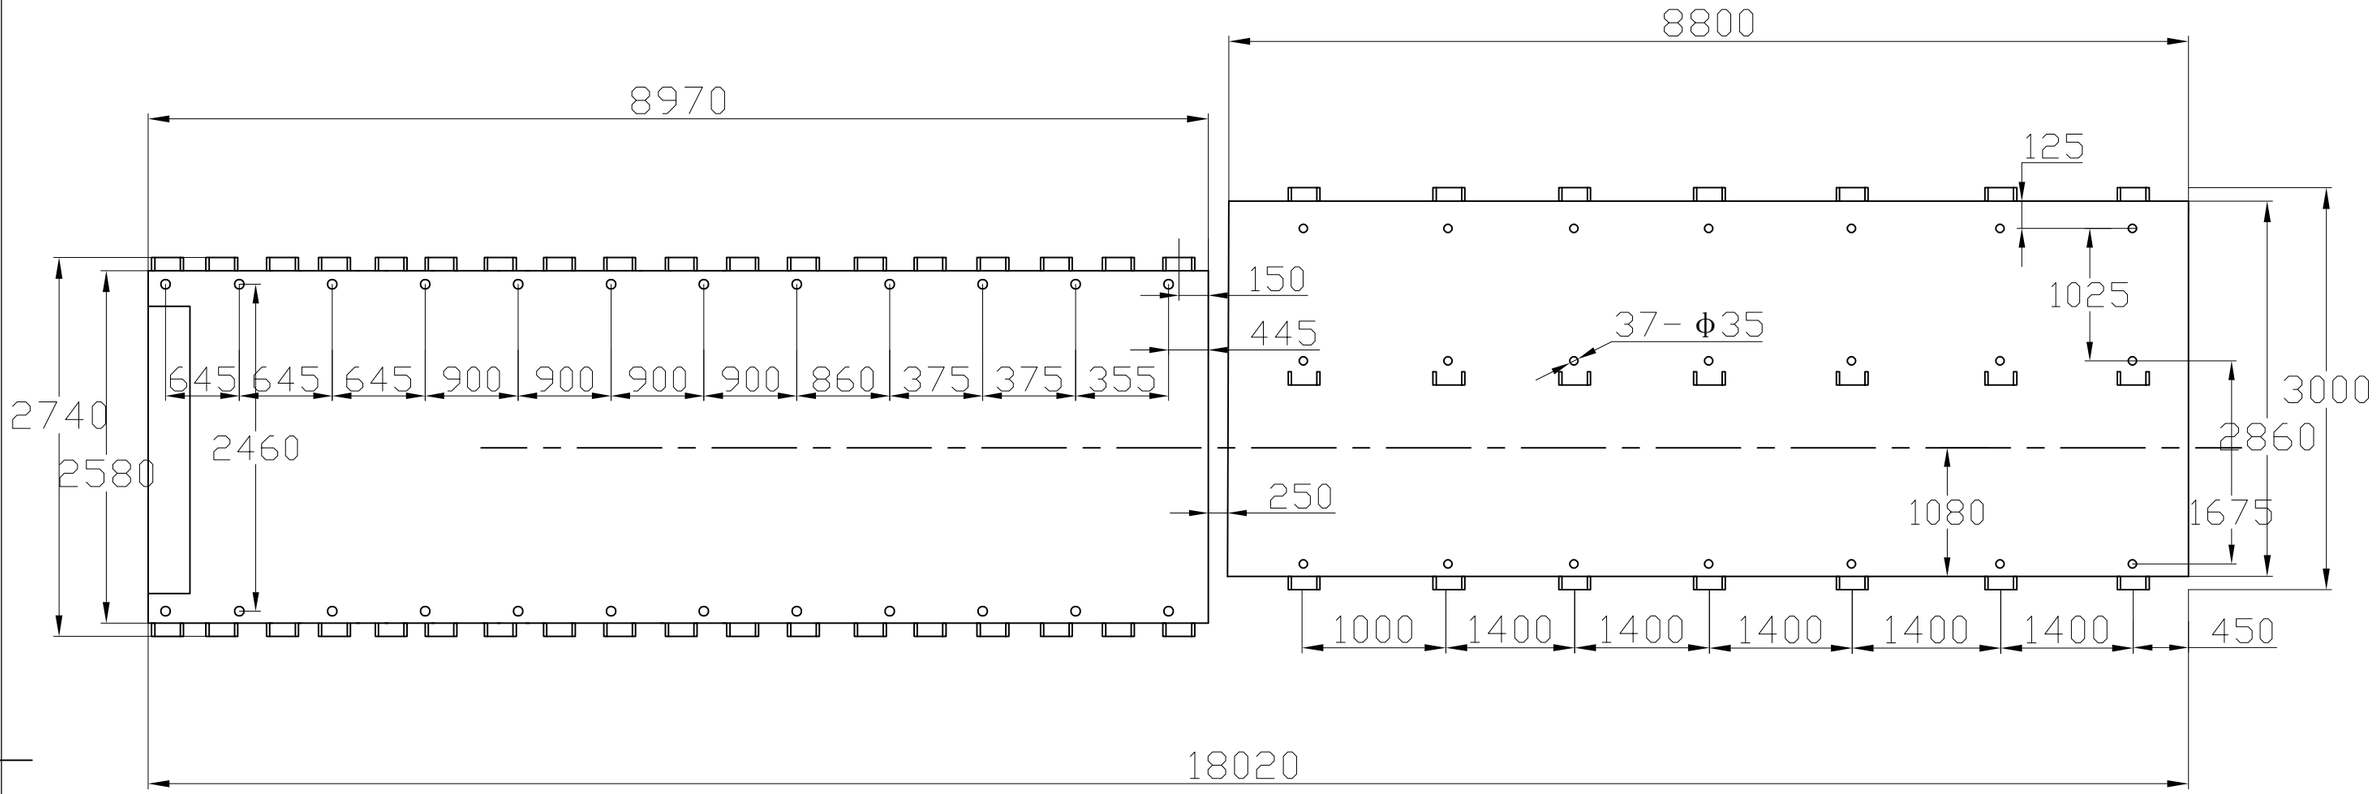

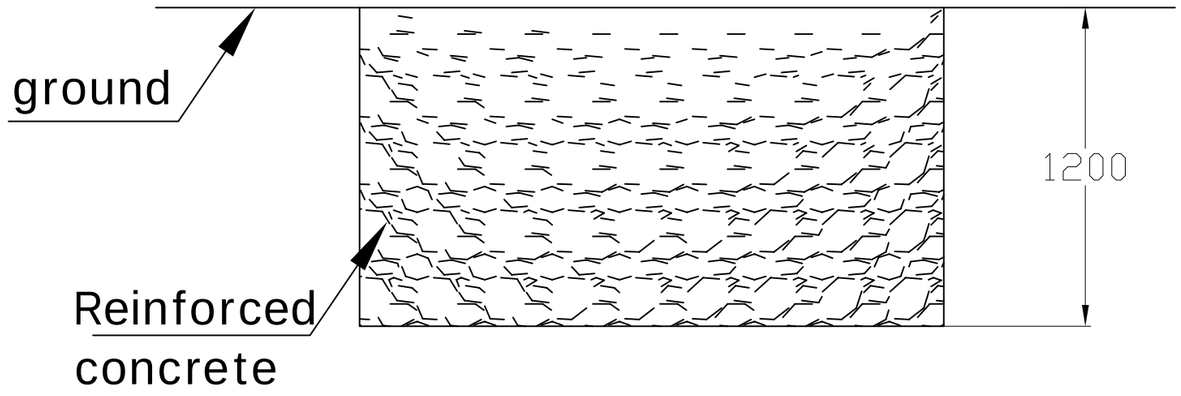

U2800TS foundation

1. The foundation is 1.2m deep. On average, one 16mm-diameter reinforcing bar is laid every 0.4m, in three layers. The ground is leveled and the floor is paved with iron plates 10mm thick under each pad.
2. The ground bearing capacity should be greater than 10T/m.
3. The machine must be grounded.
4. Leave a 2-meter space on the left side for the high-pressure oil pipe, and a 0.8-meter space on the right side for the cooler.

		分区	更改文件号	年 月 日		重量	件/台	比例	地基示意图
设计									
校对							1		U2800TS
审核									
工艺			批准			版本			

描校

日期

A

B

3

4